



Total Solution Provider in Saw Device

FS0881B1

CDMA, RF-Rx SAW Filter
Revision 0: June 2006



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	- 25	-	+ 75
Storage Temperature Range	°C	- 40	-	+ 85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package size	B1			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	881.5	-
Insertion Loss within 869 ~ 894 MHz	dB	-	1.9	3.0
Amplitude Ripple within 869 ~ 894 MHz	dB	-	1.0	1.5
Attenuation:				
DC ~ 849 MHz	dB	22	25	-
914 ~ 939 MHz	dB	25	32	-
939 ~ 1049 MHz	dB	25	30	-
1049 ~ 2000 MHz	dB	23	26	-
VSWR within 869 ~ 894 MHz	-	-	1.9	2.5

Notes : (1) No Matching Network .


Package Dimensions

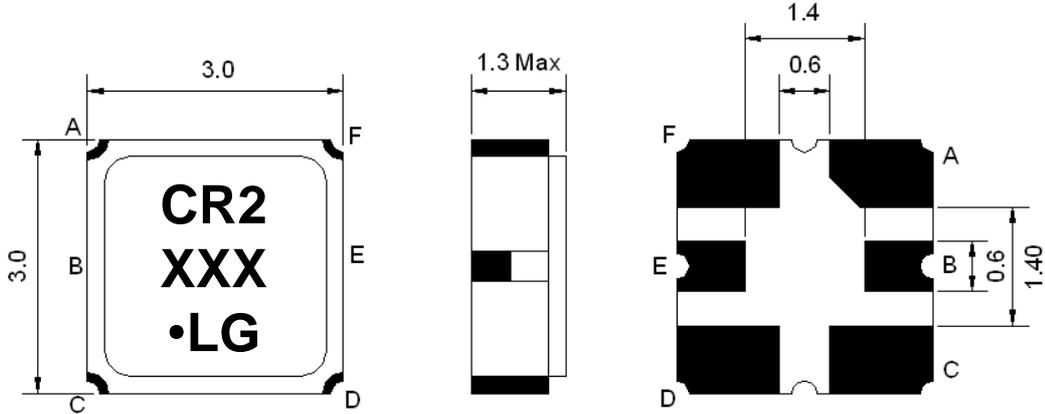

Marking Descriptions	
C	CDMA Application
R	Rx SAW Filter
2	Version
XXX	Year, Month, Date
•LG	1 st Pin Mark & Manufacturer

Pin Description	
A, C, D, F	Ground
B	In
E	Out

Testing Environment

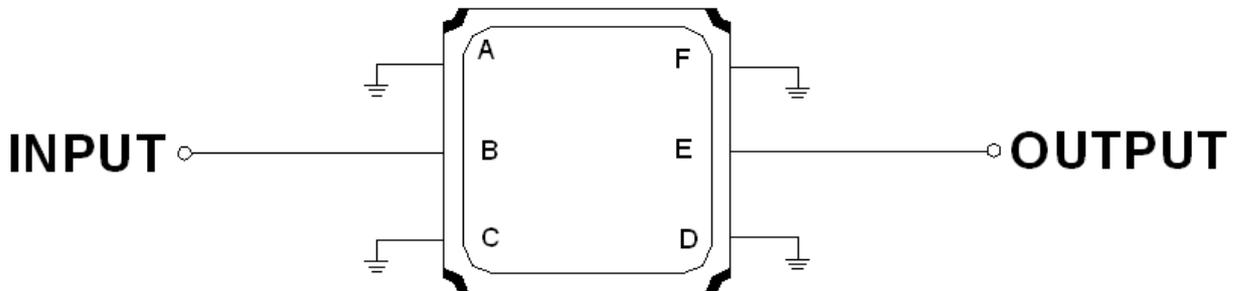

Source & Load Impedance: 50 Ω