



Total Solution Provider in Saw Device

SA1191DP1

Wireless, RF SAW Filter
Revision 0: July 2010



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	-
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	P1			
Length x Width	mm ²	-	3.8 x 3.8	-
Height	mm	-	-	1.4

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	1191.8	-
Insertion Loss within 1164.3 ~ 1219.3 MHz	dB	-	2.5	4.0
Amplitude Ripple within 1164.3 ~ 1219.3 MHz	dB _{p-p}	-	0.8	2.0
Group Delay Variation within 1164.3 ~ 1219.3 MHz	ns _{p-p}	-	21	40
Attenuation:				
900.0 ~ 1040.0 MHz	dB	20	23	-
1040.0 ~ 1126.0 MHz	dB	20	22	-
1256.0 ~ 1345.0 MHz	dB	15	21	-
1345.0 ~ 1500.0 MHz	dB	15	20	-

Notes : (1) With Matching Network


□ Package Dimensions

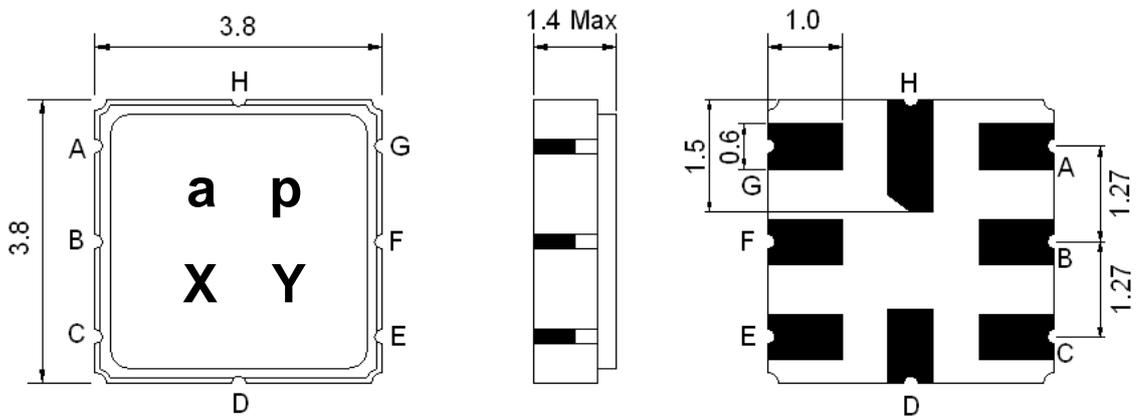

Marking Descriptions	
a	Wireless Application
p	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, D, G, H	Ground
B	In
F	Out
E	Shunt Capacitor Ground



□ Testing Environment

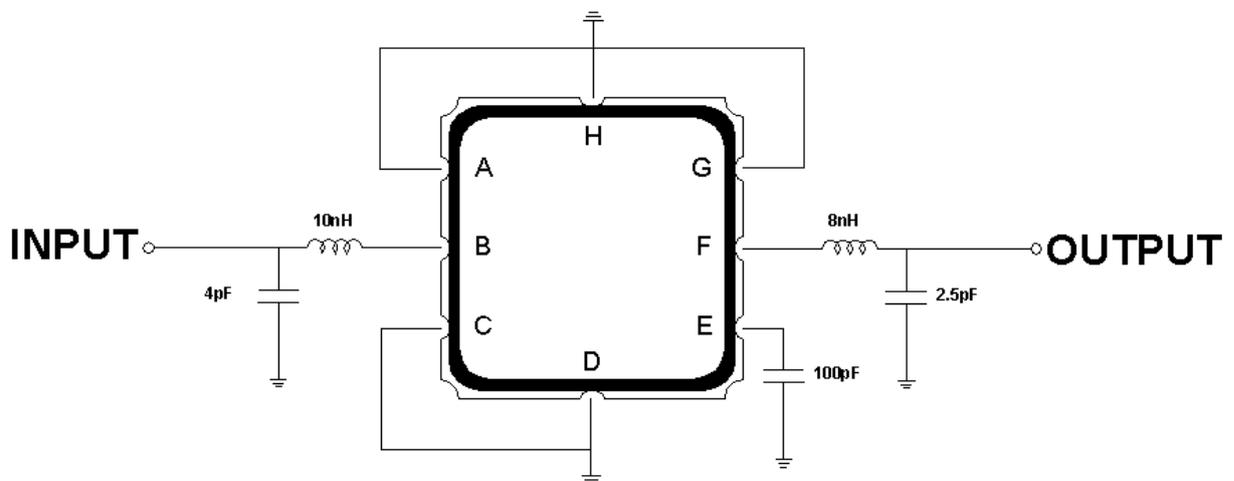


Source & Load Impedance: 50 Ω

□ Frequency Characteristics

Frequency Response

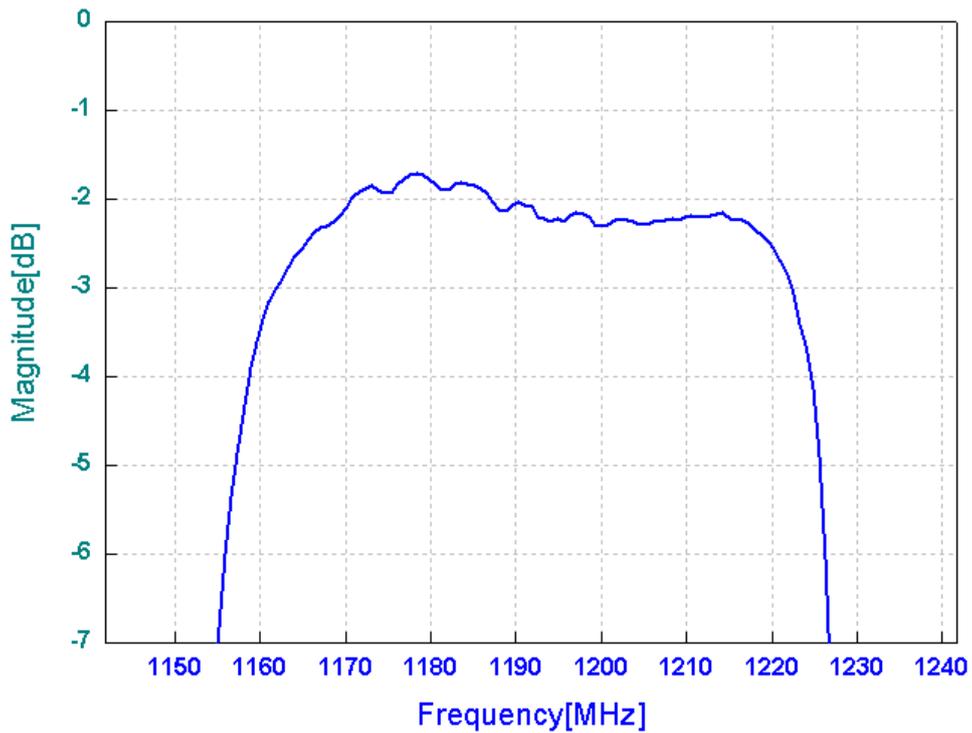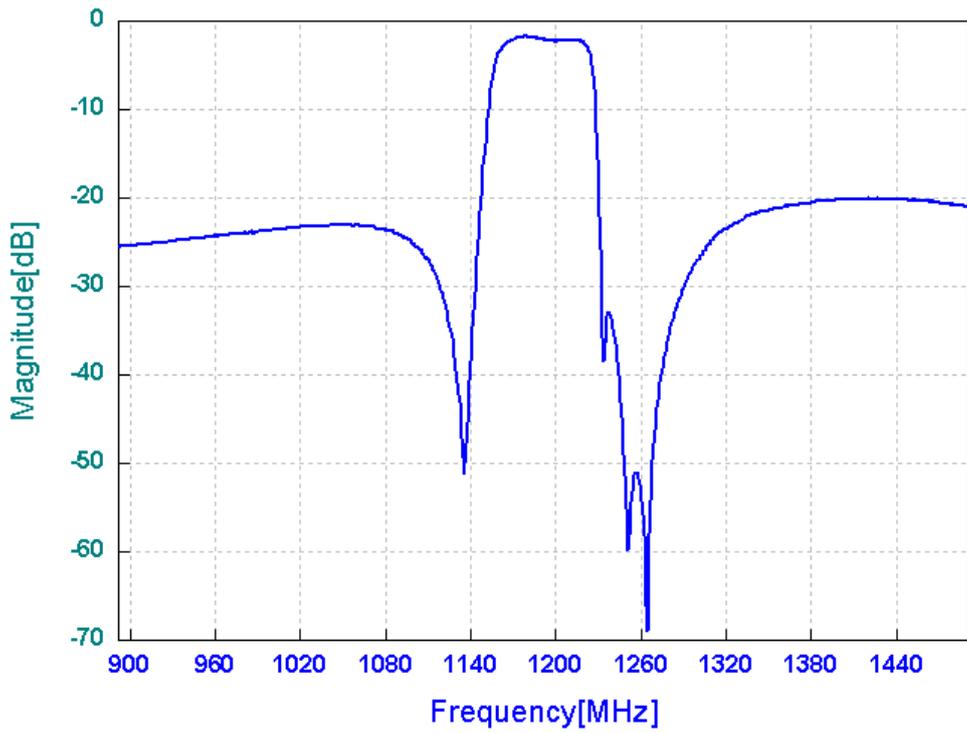

Group Delay

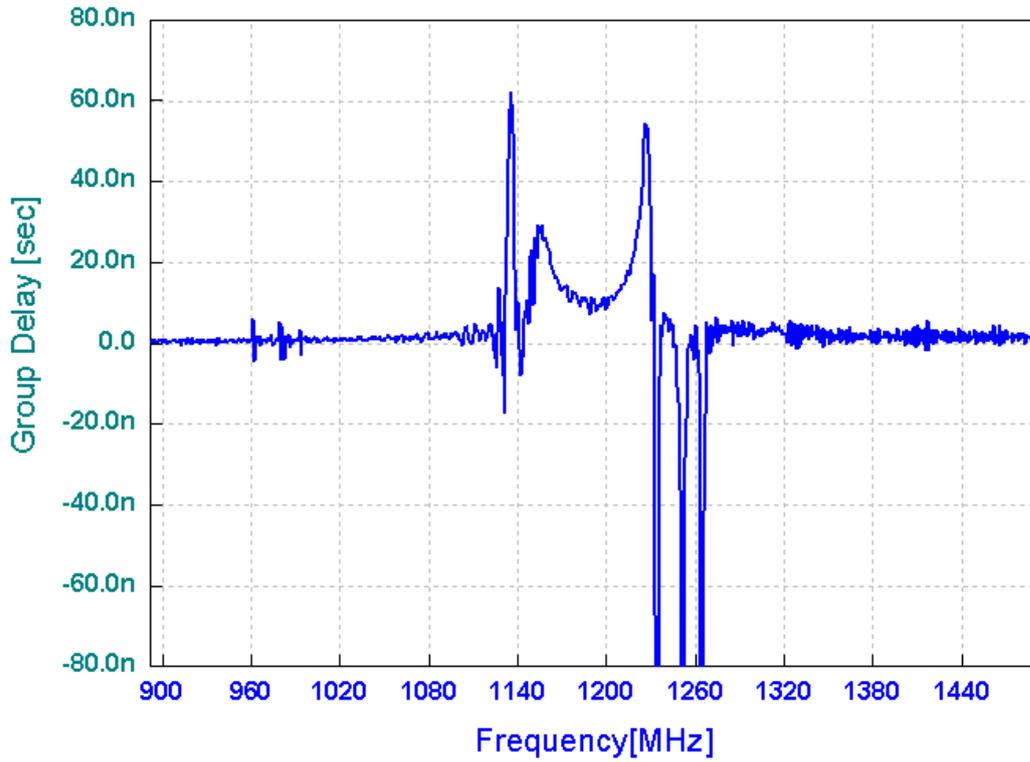

Smith Chart

